



## Infrared Patio Heater

### OCF Series



Black  
OCF15120

Stainless steel  
OCF30240, OCF40240, OCF60240

### Why choose infrared heating?

- Directly heat people and objects.
- Are not affected by drafts or by the wind.
  - Provide instant heat.
- Make it possible to focus the heat.
  - Easy to install.
- Element service life  $\pm$  5000 hours.



## 120V Model

CF15120B

**Voltage:** 120V with power cord


**Heat density:** 21 W/sq. ft.

### Installation:

Wall mount



### Heat coverage:

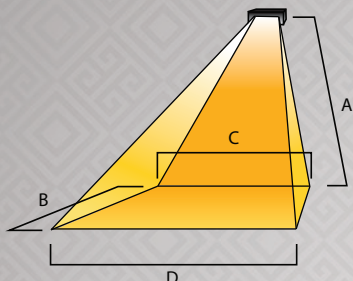

## 240/208V Models

CF30240B, CF40240B, CF60240B

**Voltage:** 240/208V hard-wired

**Heat density:** 25 W/sq. ft.


### Installation:

Wall mount


Ceiling mount



### Heat coverage:

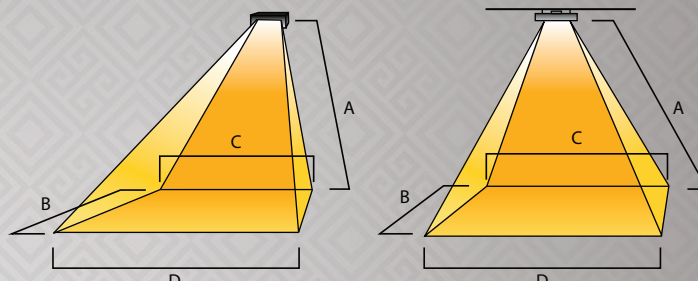


Watts	A		B		C		D		Heat coverage	
	ft.	in.	ft.	in.	ft.	in.	ft.	in.	sq. ft.	sq. m
<b>Wall mounted</b>										
1500W	8'		8		8		9		72	6.7
3000W	8'		11		10		12		120	11.2
4000W	8' 2"		11		10		12		140	13.0
6000W	10'		12		10		12		150	13.9
<b>Ceiling mounted</b>										
3000W	8'		11		11		11		120	11.2
4000W	8'		11		12		12		140	13.0
6000W	8'		12		12		12		150	13.9

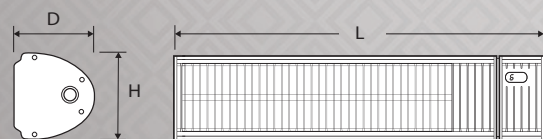

Side View

Front View

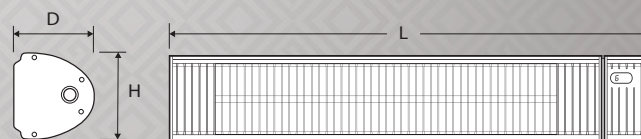

Side View

Front View

Watts	Volts	Product # <sup>1</sup>	Grounded 3-pronged outlet	L		Length H		D		Weight	
				in.	mm	in.	mm	in.	mm	lb	kg
1500	120	CF15120B	15A, 120VAC	27	685.8	6 1/2	165	6 5/16	161	10.0	4.5
3000/2250	240/208	CF30240SS <sup>2</sup>	-	38	965.2	6 1/2	165	6 5/16	161	14.3	6.4
4000/3000	240/208	CF40240SS <sup>2</sup>	-	42	1066.8	9	228.6	9	228.6	40.0	18.2
6000/4500	240/208	CF60240SS <sup>2</sup>	-	42	1066.8	9	228.6	9	228.6	40.0	18.2

<sup>1</sup> Mounting brackets included. Finish: "B" for black anodized aluminum.

<sup>2</sup> Indoor residential installation forbidden.

**Finish:** Black anodized aluminum or stainless steel

**Control:** Remote with 6 control levels included for the 1500W & 3000W models.  
For the 4000W & 6000W models, two heating controls.