



Architectural Radiant Panel ORP Series



**Clean, economical and produces enveloping warmth.
Simple installation and can be relocated.**



Enveloping warmth:

Radiant heating creates warmth through a natural process of heating people and objects directly.



Clean:

It operates without circulating air, which helps to create a dust-free environment.




Economical:

Enjoy increased comfort at lower temperature settings, which saves you money.


Installation of the radiant panel:

Minimum installation height from floor of 7 ft. (2.13 m).
 and 2 in. (50.8 mm) minimum clearance above the panel.


Suspended from a ceiling

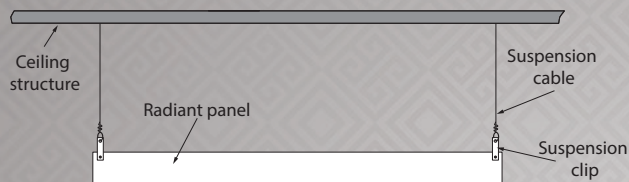


Inserted into a T-Bar suspended ceiling

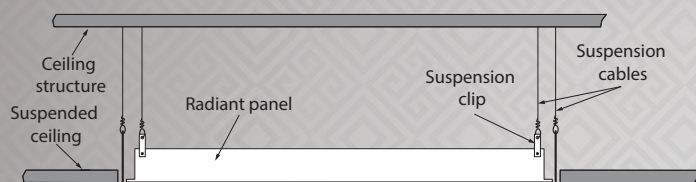

Surface-mounted on gypsum ceiling - Option SF

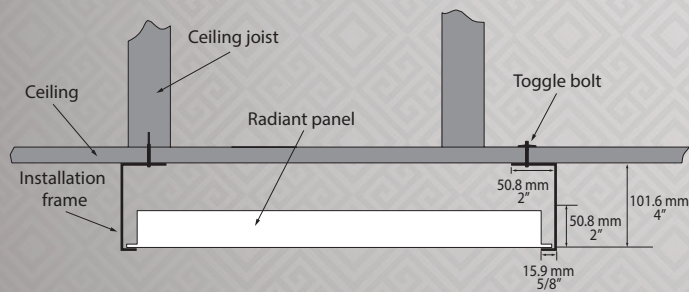

Recessed-mounted on gypsum ceiling - Option PF

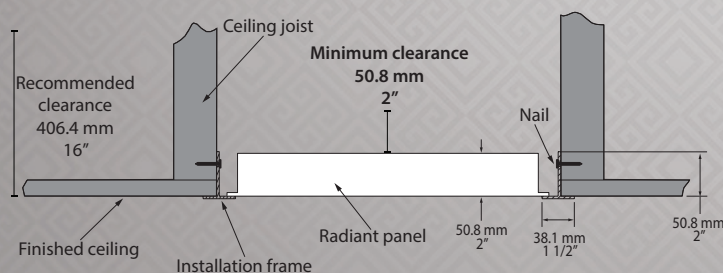

Color:


- Standard polar white PW
- Optional (upcharge applicable):
 Black Therma Ray PB-0218-HT -SP.

Construction:


- High-temperature polyester powder paint
- 22-gauge galvanized steel
- Reflective foil
- 2 in. mineral wool insulation, 4 PSF density

Heating Element:

- Nickel-chrome alloy resistance wire

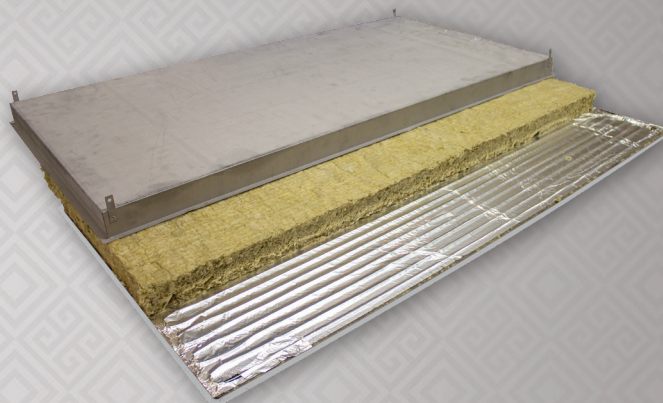

Dimensions:

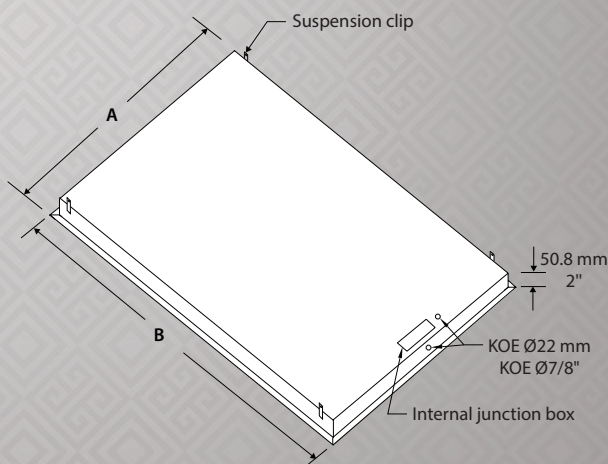

	AS2424		AS2448		AS1448		AS1460	
	mm	in.	mm	in.	mm	in.	mm	in.
A	603.25	23 3/4	603.25	23 3/4	349.25	13 3/4	349.25	13 3/4
B	603.25	23 3/4	1212.85	47 3/4	1212.85	47 3/4	1517.65	59 3/4