

Self-Regulating Heating Cables


OSR Series

eltherm
innovations in heat tracing 

OSR-NA Series

3 to 10 W/ft.

Available in AO, BO, BOT

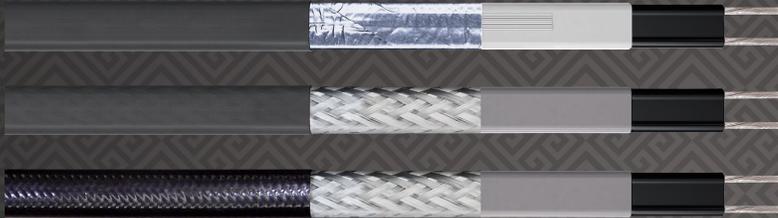

Roof and gutter de-icing system.

OSR-MA Series

3 to 5 W/ft.

Available in AO, BO



Pipe tracing for freeze protection and temperature maintenance.

OSR-MA Series

3 W/ft.

Available in BF



OSR-HA Series

3 to 20 W/ft.

Available in BOT



Industrial.

OSR-PI Series

120V Preassembled Self-Regulating Heating Cable


8 W/ft.

Available in AO






EL-CLIC Quick Connector

Quick connection of 1, 2 or 3 cables
Easy to install: no special tools required
Sturdy, waterproof and UV-resistant box

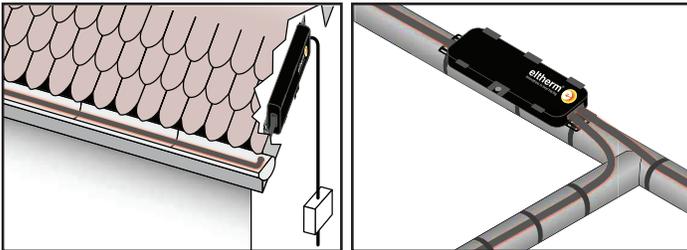

PHILMAC 3G FITTINGS

Quick connect plumbing kit for polyethylene pipes
Specialized fittings, supplied preassembled
and ready to use

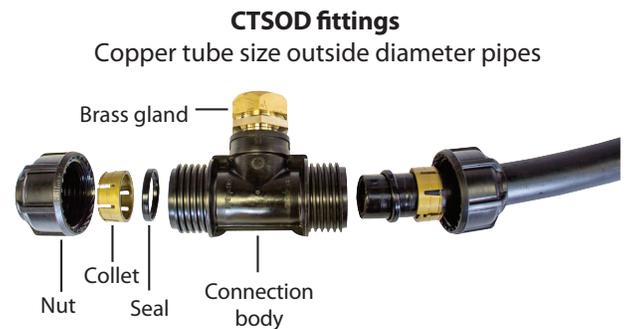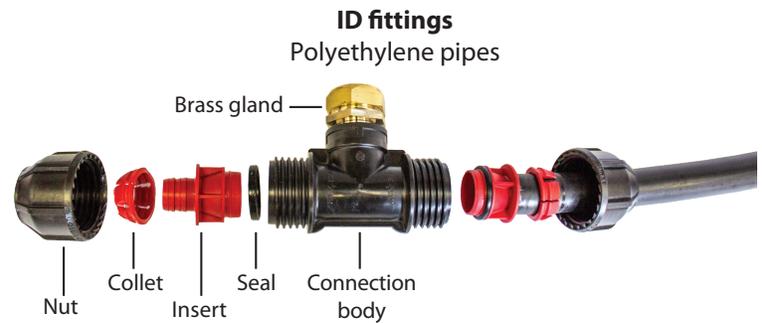

Temperature control ELTC-14-RTD

Wall mounted with digital display
Power relay of 20A at 90-260V
Including 3-wire RTD (Pt-100) sensing element is 5 x 50 mm
with 5 m of fluoropolymer lead wires
Range 0 °C to 250 °C

