




## Uncoupling self-adhesive membrane for floor heating cable, OTR Series

Neutralizes subfloor movement  
from creating cracks to the floor covering.

- Can be installed by an electrician;
- Self-adhesive, no need for thin-set mortar<sup>1</sup>;
- Quick installation and no wait time between laying the membrane and laying the cable;
- Castellated structure designed for quick and easy installation of cables, North America approved model;
- Optimal heat distribution from the cable to the floor;
  - Spacing of 3 5/8" and a density of 10W/sq. ft.


<sup>1</sup> May need the application of a primer.



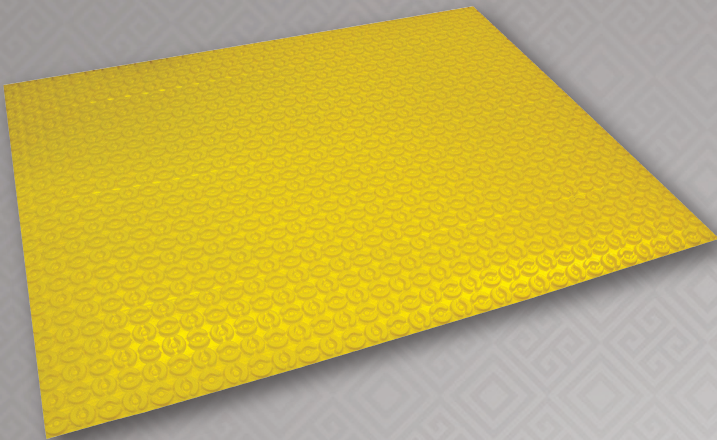

## Membrane in sheets **NADCM-S-80**

Box of 10 sheets - 2'6-5/16" x 3'3"  
Covered surface 81.6 sq. ft.

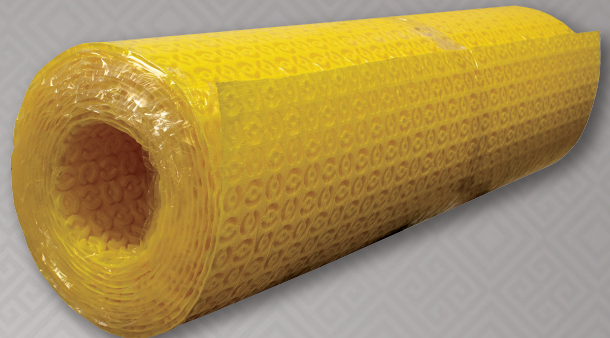

## Membrane in rolls **NADCM-S-150**

Roll of - 46'7" x 3'3"  
Covered surface 150 sq. ft.

## Approved

The DCM-PRO membrane is suitable for heavy commercial applications according to the Robinson C627 test.  
Rated as Anti-Fracture membrane as tested by the TCNA against ANSI A118-12.

