

TECHNICAL DETAILS

SA-LCD15

DIGITAL VENTILATOR WALL CONTROL

Decora-type wall control for residential air exchangers WITH RECIRCULATION MODE AND HUMIDITY MANAGEMENT.

GENERAL FEATURES


1. Fits standard 2 x 3" wall box.
2. Included wall plate which can be user-substituted with any Decora style plate to suit any decor.

MODES OF OPERATION


1. ECONOMIC — 20 min. Low speed/ 40 min. standby
2. CONTINUOUS — In High speed or Low speed
3. HUMIDITY — Switches to HIGH speed when ambient relative humidity exceeds user-adjustable setpoint
4. RECIRCULATION — In High speed or Low speed
5. OFF — Does not operate until restarted by user.

COMPATIBILITY

Compatible with ERVs and HRVs manufactured from November 2024.

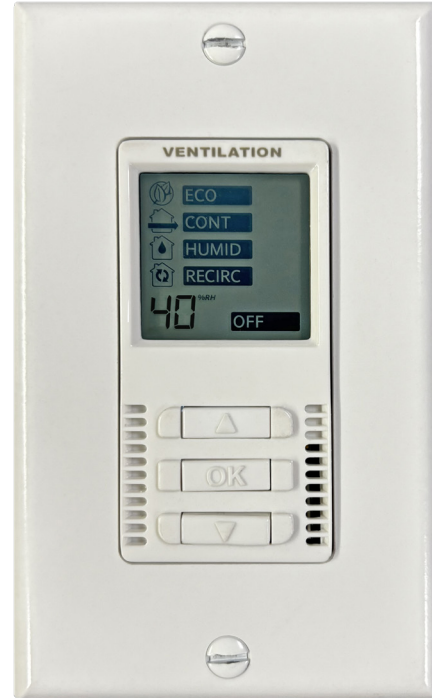

DIMENSIONS

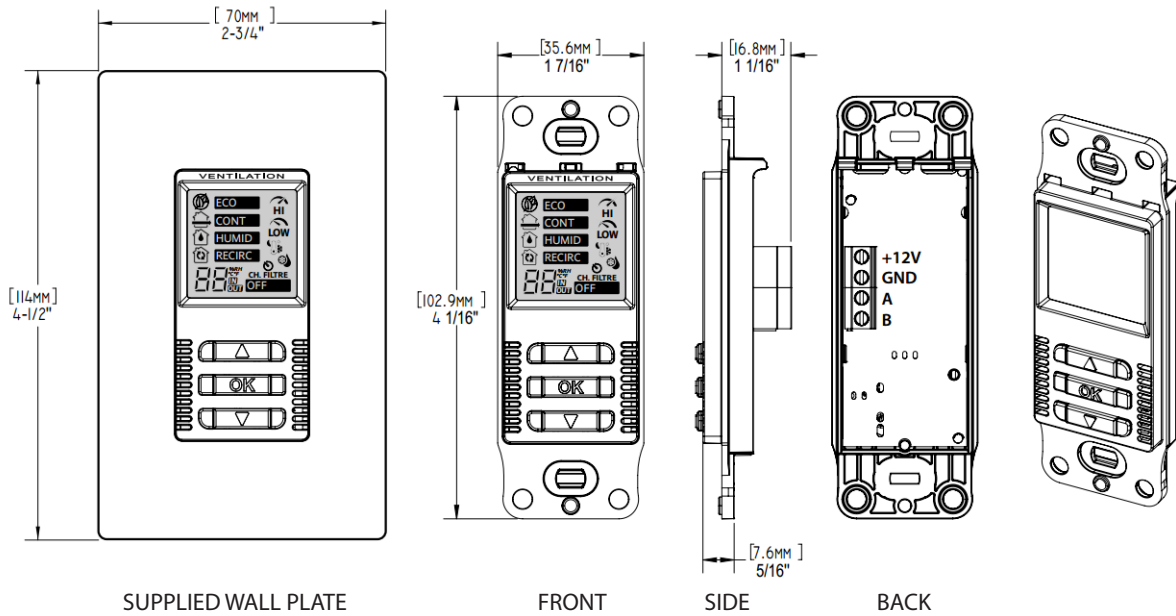

QUELLET	innovair		Global Commander	epurair
1 800 463-7043	1 800 567-2733	305 463-9998	1 800 463-7043	1 800 205-1108
ouellet.com	dettson.com	innovair.com	globalcommander.ca	epurair.com