

DECOR

Architectural Ceramic Glass Patio Infrared Heater



Bluetooth control using the Aura Connect™ application.



Features

Color

- Standard: black.

Finish

- Standard: powder paint.

Voltage

- 240/208V, 60 Hz, 1-phase.

Construction

- Weatherproof IP65 certified for outdoor use.
- 2 mm thickness aluminum extrusion casing.
- High quality aluminum optical reflector.
- Power cord of 6 ft. (1.8 m) hard-wired.
- 304 stainless steel ceramic glass trim.

Heating element

- Woven carbon filament infrared lamp inside a 15 mm Quartz tube.
- Element service life ± 8000 h.

Wavelength

- Mid-wave (2 μ m).

Control

- On/Off integrated regulator and a remote control with 6 heat settings.
- The heater can be wired to bypass the remote control if required (Junction box not included).

Certification

- Comply with the standard UL2021:2015 Ed.4 and C22.2 No.46: 2013 Ed.9.

Installation

- Horizontal installation only.
- Pivoting wall mounting brackets included.
- Mounting brackets for ceiling suspension available as an option, must order separately (CFCEIL).
- Installation minimum clearances:
 - Canada: 8 ft. (2.4 m) from floor.
 - United States: 6 ft. 7 in. (2 m) from floor.
 - 8 in. (20.3 cm) from ceiling, 20 in. (50.8 cm) between the end of the unit to the wall and 20 in. (50.8 cm) between the longer side of the unit to the wall.
- Hard-wired into an electrical junction box (not included).

Warranty

- 1-year warranty against defects.
- 90-day warranty on the element (for industrial applications only).

Application

- Temporary back-up heating, workshop, garage, solarium, pool and spa, balcony, patio, bar, restaurant, hotel, church.

Model


Watts	Volts	Product # [†]	Dimensions				Weight			
			L in.	L mm	H in.	H mm	D in.	D mm	lb	kg
3000/2250	240/208	ADGLASS-30240B	42.6	1082	6	152.4	5	127	17	7.7

Standard color is black.

[†] Wall mounting brackets included.

Option

Product # Kit	Description
CFCEIL	Kit of 2 mounting brackets for ceiling suspension

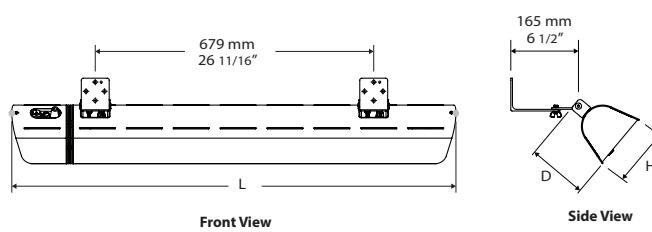

Heater Coverage Pattern

	(A) Mounting height	(B) Width	(C) Depth	Heat Zone	Average Heat Density
Canada	8 ft. (2.4 m)	10 ft. (3.1 m)	6 ft. (1.8 m)	60 ft. ² (5.6 m ²)	25W/ft. ²
United States	6 ft. 7 in. (2 m)	8 ft. (2.4 m)	6 ft. (1.8 m)	48 ft. ² (4.5 m ²)	20W/ft. ²

