



Infrared Patio Heater OCF Series



Why choose infrared heating?

- Directly heat people and objects.
- Are not affected by drafts or by the wind.
 - Provide instant heat.
- Make it possible to focus the heat.
 - Easy to install.
- Element service life \pm 5000 hours.

120V Model

CF15120B

Voltage: 120V with power cord


Heat density: 21 W/sq. ft.

Installation:

Wall mount



Heat coverage:

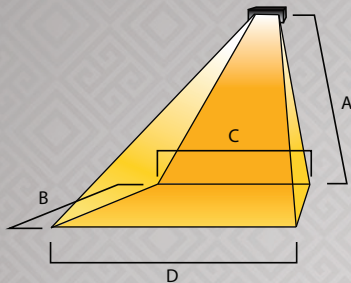

240/208V Models

CF30240B, CF40240B, CF60240B

Voltage: 240/208V hard-wired

Heat density: 25 W/sq. ft.


Installation:

Wall mount

Ceiling mount



Heat coverage:

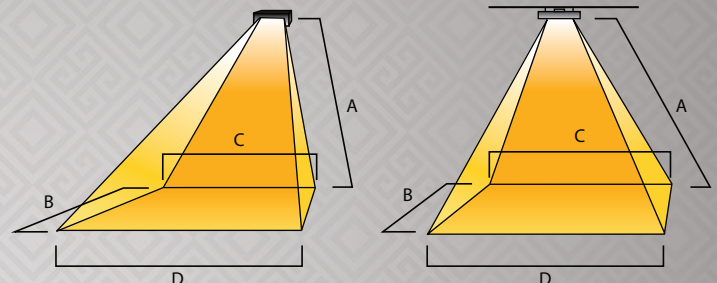

Watts	A		B		C		D		Heat coverage		
	ft. in.	m	ft.	m	ft.	m	ft.	m	sq. ft.	sq. m	
Wall mounted											
1500W	8'	2.44	8	2.44	8	2.44	9	2.74	72	6.7	
3000W	8'	2.44	11	3.35	10	3.05	12	3.66	120	11.2	
4000W	8' 2"	2.49	11	3.35	10	3.05	12	3.66	140	13.0	
6000W	10'	3.05	12	3.66	10	3.05	12	3.66	150	13.9	
Ceiling mounted											
3000W	8'	2.44	11	3.35	11	3.35	11	3.35	120	11.2	
4000W	8'	2.44	11	3.35	12	3.66	12	3.66	140	13.0	
6000W	8'	2.44	12	3.66	12	3.66	12	3.66	150	13.9	



Watts	Volts	Product # ¹	Grounded 3-pronged outlet	Length				D		Weight	
				L	H	D		lb	kg		
				in.	mm	in.	mm	in.	mm		
1500	120	CF15120B	15A, 120VAC	27	685.8	6 1/2	165	6 5/16	161	10.0	4.5
3000/2250	240/208	CF30240B ²	-	38	965.2	6 1/2	165	6 5/16	161	14.3	6.4
4000/3000	240/208	CF40240B ²	-	42	1066.8	9	228.6	9	228.6	40.0	18.2
6000/4500	240/208	CF60240B ²	-	42	1066.8	9	228.6	9	228.6	40.0	18.2

¹ Mounting brackets included. Finish: "B" for black anodized aluminum.
² Indoor residential installation forbidden.

Finish: Black anodized aluminum

Control: Remote with 6 control levels included for the 1500W & 3000W models.
 For the 4000W & 6000W models, two heating controls.